EQUINOX 41 LCD TOUCHSCREEN


User Interfaces

EQ41TB-TI

With its minimalistic on-wall presence Equinox 41 functions as a graphical user interface to the Vantage system and provides a personalized dashboard for multi-system control. Key to accomplishing this are the on-screen widgets. Once configured, widgets can easily be edited on the device itself. In addition, individualized profiles can be created based on time of day, location, function, or individual.

Utilizing the power of InFusion and Design Center software Equinox devices come with both a predefined graphical interface and an auto-configuration capability. This predefined environment allows integrators to efficiently create intuitive screens that are consistent with the entire user environment while InFusion provides the ability to completely customize the luxury space.






Product Highlights

- 4.3" LCD panel with projected capacitive touch interface
- Titanium TrimLine II frame, black glass-to-edge surface aesthetic
- Unique Equinox widget user interface
- Ambient light sensor for auto day/night backlighting
- Motion sensor screen ON and initiate a task
- One visible widget with full screen and edit modes
- 90% daily control through the dashboard layer
- UI consistency with smartphones (Android and iOS) and Equinox 73
- Active IR sensors for approach On and Auto sleep modes
- Uses standard US and European single-gang wall box mechanics
- Dynamically updated
- Low power consumption
- Tap, swipe, press and hold to navigate
- Cat5e connectivity with PoE

Equinox 41 delivers the ultimate in simplified touchscreen design and editability. Access all the Vantage widgets through simple gestures. The Equinox 41 enables users to adapt the UI to the changing space along with evolving needs and growth.



Equinox 41 LCD Touchscreen

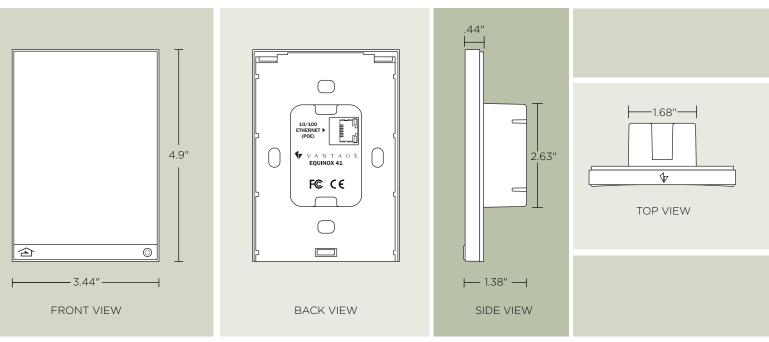

Specifications

Dimensions, HWD

Overall	4.9" x 3.44" x 1.38" (124mm x 87mm x 35mm)
On-Wall Surface	4.9" x 3.44" x 0.44" (124mm x 87mm x11mm)

General Specifications

Model	EQ41TB-TI
Weight	1.6 lb (725.75g)
Display	Active Matrix Color LCD
Display Size	4.3" Diagonal
Display Resolution	800 x 480 pixels
Hard Buttons	Left - Home / Right - Programmable
Power	12VDC via PoE
Surge Suppression	Yes
Sound Option	Adjustable Volume Level - Touch Interaction
Wiring Connections	Ethernet RJ45
Addressing	Self Addressing Through Software
Finishes	Trim: Titanium Touchscreen: Black Glass
Glass Surface	Chemically Strengthened
Ambient Operating Temperature	32°F - 95°F (0°C - 35°C)
Ambient Operating Humidity	5 - 95% Non-condensing
Certification	CE, FCC

Widget Options

See Widget Cutsheet for additional details



System Compatibility

InFusion