TPT2 7" INSTALL KIT

User Interfaces

Vantage's TPT2 7" Standard Install Kit is designed to mount the TPT2 7" Touchscreen and is primarily for new construction applications. For simplicity the Wall Box may be mounted on the left or right side of the framing studs, an optional bracket VHA-1112 is available to support the Wall Box centrally between framing studs. An inner support ring is pre-installed and used to fix horizontall rotation and z dimension for perfect on-wall alignment of the Touchscreen. Rough-in should include power and communication pre-wire via an Ethernet POE connection.






Product Highlights

- 12VDC 2A Power supply optional if POE injector is not used
- 4.38" x 6.38" x 2.56" (111mm x 162mm x 65mm)
- Generally for mounting behind standard dry wall our decorated surface
- TPT2 7" requires power and communication pre-wire via an Ethernet POE connection
- Kit comes complete with adjustable support frame



TPT2 7" Install Kit

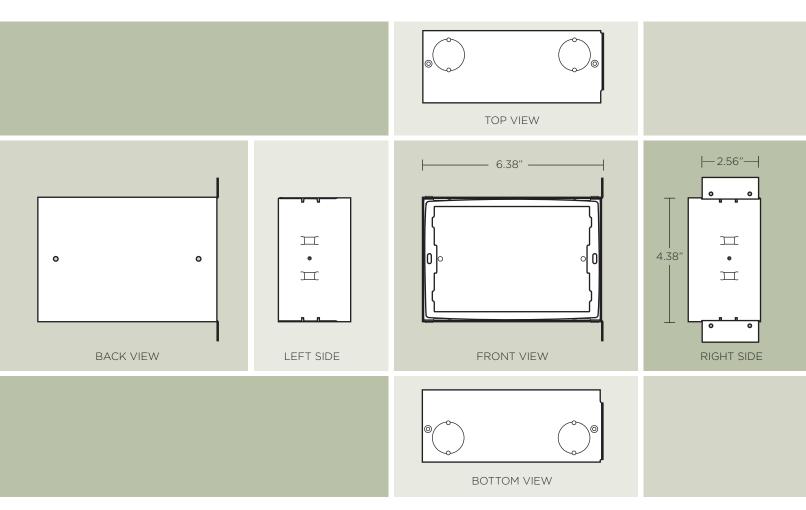

Specifications

Dimensions, HWD

4.38" x 6.38" x 2.56" 111mm x 162mm x 65mm

General Specifications

Model Weight Kit Contents Power and Communication TPT27-STD-INSTALL 1.3lbs Install metal wall box Pre-wire via Ethernet POE connection

System Compatibility

InFusion